


### COLOUR HP 343 CARTRIDGE

1. Peel back label to locate filler hole (**See Diagram**)
  2. Assemble syringe and steel filling tube and fill with appropriate colour ink.
  3. Insert steel filling tube into the appropriate filling hole and push into the centre of the sponge. Making sure the filling tube is straight and not at an angle.
  4. **SLOWLY** inject ink until slight leakage appears from the filling hole.
  5. After refilling place label back over filling holes.
- IMPORTANT:** Clean syringe and dry for future use or use with a different colour.
6. Leave the cartridge to stand overnight on protective non-absorbent surface this will ensure no leakage and give the ink time to fully saturate the sponge.
  7. Install cartridge and run a priming cycle.

**IMPORTANT:** For best results, refill whilst ink still remains in the cartridge.  
Empty cartridges left for more than a week do not always give a successful re-fill.

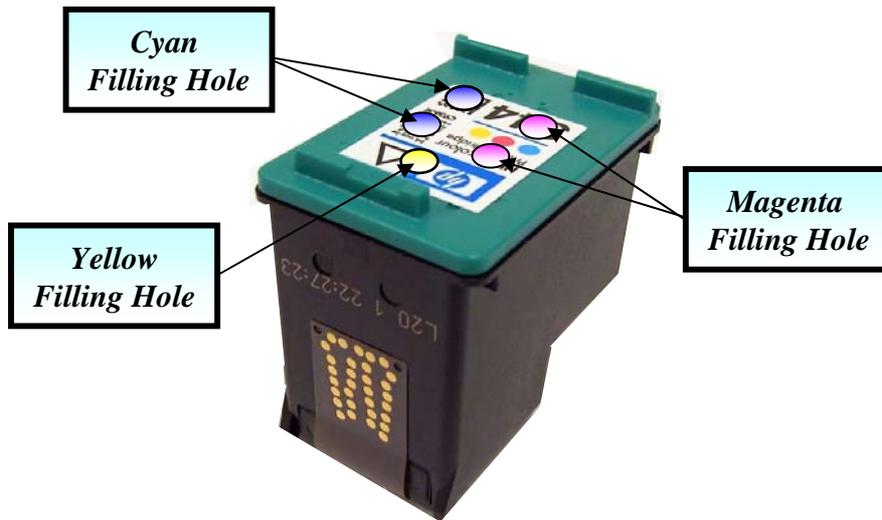

### COLOUR HP 344 CARTRIDGE

1. The filler holes are located under the coloured top of the cartridge
2. Peel label back on top of cartridge.
3. Assemble syringe and steel filling tube and fill with appropriate colour ink.
4. Insert the steel filling tube into the appropriate filling holes. (See diagram above). Push down into centre of the sponge.

**IMPORTANT: Cartridge contains a sponge and a slight resistant may be felt.**

5. **SLOWLY** Inject ink. When ink overflows from filling hole or starts to leak from print heads cartridge is full. Stop injecting immediately. Blot printer heads with tissue before continuing to fill next colour.


**IMPORTANT: Clean syringe with water and dry before refilling next colour.**

6. After refilling replace label back over hole and seal with adhesive tape.
7. Leave the cartridge to stand overnight on **non-absorbent** surface this will ensure no leakage and give the ink time to fully saturate the sponge.

**IMPORTANT: DO NOT LEAVE ON TISSUE.**

8. Install cartridge and run a priming cycle.

**PLEASE NOTE: The ink indicator level may need to be turned off. Check your HP instructions manual for details.**

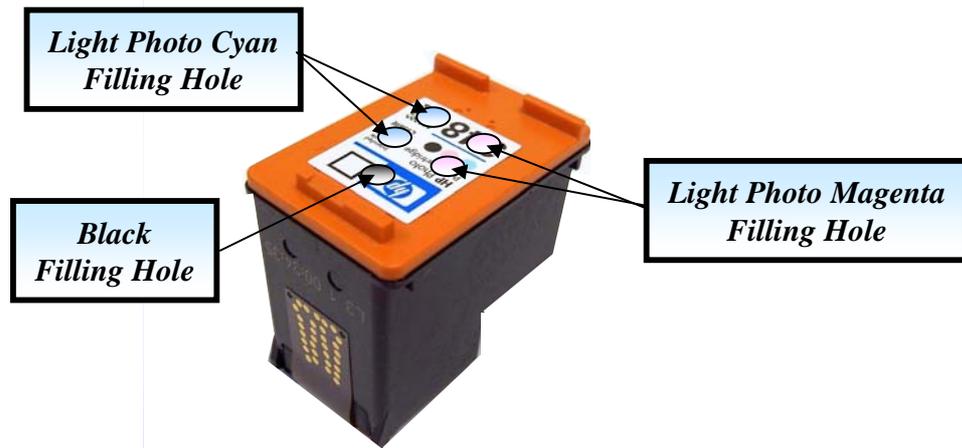

### PHOTO HP 348 CARTRIDGE

1. Peel back label to locate filler hole (**See Diagram**)
  2. Assemble syringe and steel filling tube and fill with appropriate colour ink.
  3. Insert steel filling tube into the appropriate filling hole and push into the centre of the sponge. Making sure the filling tube is straight and not at an angle.
  4. **SLOWLY** inject ink until slight leakage appears from the filling hole.
  5. After refilling place label back over filling holes.
- IMPORTANT:** Clean syringe and dry for future use or use with a different colour.
6. Leave the cartridge to stand overnight on protective non-absorbent surface this will ensure no leakage and give the ink time to fully saturate the sponge.
  7. Install cartridge and run a priming cycle.

**IMPORTANT:** For best results, refill whilst ink still remains in the cartridge.  
Empty cartridges left for more than a week do not always give a successful re-fill.



### Hewlett Packard

1. Enlarge the filling hole sufficiently to accept the steel filling tube using the Drill piece provided.
2. Fill syringe with appropriate colour ink, insert the steel filling tube into the filling hole and push downwards into the centre of the sponge.
3. **SLOWLY** inject ink, when the ink overflows from filling hole cartridge is full. Stop injecting ink immediately.
4. Place plug provided in to filling hole.

**IMPORTANT: Clean syringe with water and dry.**

5. Leave cartridge to stand overnight on a protective, **non-absorbent** surface, this will ensure no leakage and give the ink time to fully saturate the sponge.

**IMPORTANT: DO NOT LEAVE ON TISSUE.**

6. Install cartridge and run a priming cycle.

**NOTE: The expiry chip is design to blow once the cartridge become empty. disregard ink out warning generated by your Computer / Printer.**

**IMPORTANT: For best results, refill whilst ink still remains in cartridge. Empty cartridges should be refilled immediately.**